


Emergency power pack for LED downlight

EMERGENCY POWER PACKS POWER PACK



● MPP/M/LED

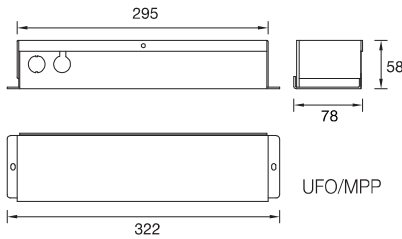

Dimension: mm NTS

TECHNICAL DATA

Mode of Operation	: Maintained*
Lamp	: LED Lamp
Rated Duration	: 2 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 2.9W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Push button switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Fitting Construction	: Electro galvanised steel with epoxy powder coating
Cable Entry	: Ø20mm K/O hole
Weight	: 1.3kg (gross)
Compliance	: IEC 61347-2-7, IEC 61347-2-13, IEC 62384
Warranty	: 1 year


ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Model	Lamp
MPP/M/LED	LED Downlight

*Note:

Can be incorporated into combined maintained, combined non-maintained and non-maintained mode of operation.

** Please ensure that your LED Lamp & Driver are suitable for Emergency installation.



LED

LED



Type and batch tested with
PSB PLUS-LISTED LABEL



IP20
CLASS I



Specifications subject to changes without prior notice.

