

EMERGENCY LIGHTS TWIN LAMP



LED Non-maintained emergency twin light



● MTL/NM/L203 NC



● MTL/NM/L203 NC WP
(Weatherproof)

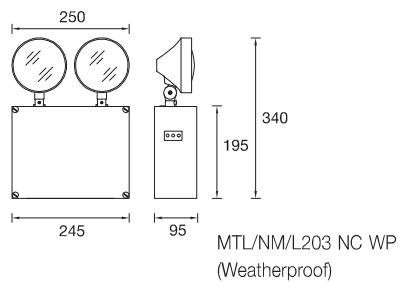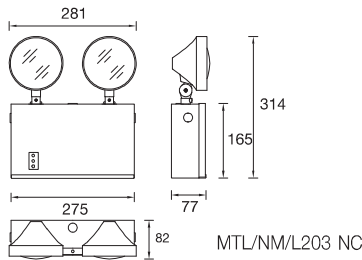


Dimension: mm NTS

High Power L.E.D

KEY FEATURES

- > High Brightness Output
- > High Lumen/watt Efficiency
- > Low Power Consumption
- > Low Maintenance
- > Long Lifespan



Surface Mount
Wide Angle
Emergency Luminaire IP30 / IP65



TECHNICAL DATA

- Mode of Operation : Non-Maintained
- Lamp : 2 x 3W High Power LED
- Rated Duration : 3 hrs and others
- Mains Supply : 230 Volts, 50/60Hz
- Power Consumption : < 2.2W
- Battery : High temp Nickel Cadmium
- Charge Monitor : Green LED Ø5mm
- Test Facility : Micro switch
- Safety Feature : Low volt cut-off preventing battery overdischarge
- Fitting Construction : Electro galvanised steel with epoxy powder coating
The adjustable fire-retardant lamp-heads allow flexibility in angle of projection. Lamp heads comes with anti-glare lens
- Mounting : Wall
- Cable Entry : Ø20mm K/O hole
- Weight : 2.6kg (gross)
- Compliance : SS 563 : Part 1 & 2, SS IEC 60598-2-22
- Warranty : 1 year

ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Model	Lamp	Battery type
MTL/NM/L203 NC	2 x 3W LED	Nickel Cadmium
MTL/NM/L203 NC WP	2 x 3W LED	Nickel Cadmium

*Heating strip applicable (for cold room used)