


SMT LED with lifespan 50,000 burning hours
SMT LED recess mount emergency exit light

EMERGENCY EXIT LIGHTS LEDER



● **ESR/M/W510RM (E)**
Running-man graphical exit signs
comply to latest SS 563 & SS 508

● **ESR/M/W5100**

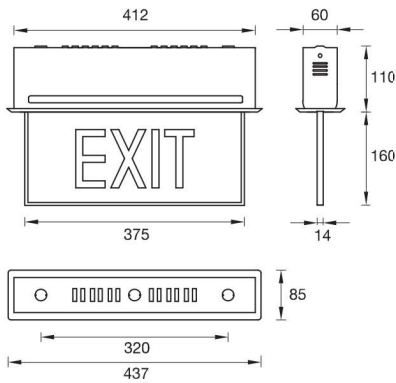

Dimension: mm NTS

TECHNICAL DATA

Mode of Operation	: Maintained
Lamp	: Maxspid 1W SMT LED Lamp
Rated Duration	: 2 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 3W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Micro switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Fitting Construction	: Electro galvanised steel with epoxy powder coating
Diffuser	: Fire retardant moulded acrylic
Mounting	: Wall or ceiling
Cable Entry	: Ø20mm K/O hole
Weight	: 2.5kg (gross)
Compliance	: SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

KEY FEATURES









- > Using Surface Mount Technology LED
- > High Durability & Reliability
- > Low Heat
- > Low Maintenance
- > Low Power Consumption
- > No "Black Ends"

 Type and batch tested with
PSB PLS-LISTED LABEL

 Recess Mount
Internal Lit
LED Slim Exit Sign
415 x 62mm

 IP30
CLASS I

ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Single Sided	Double Sided	Legend
ESR/M/W5100	EDR/M/W5100	
ESR/M/W5100 (R)	EDR/M/W5100 (R/L)	
ESR/M/W5100 (L)	EDR/M/W5100 (R/L)	
ESR/M/W5100 (D)	EDR/M/W5100 (D)	
ESR/M/W510RM	EDR/M/W510RM	
ESR/M/W510RM (E)	EDR/M/W510RM (E/W)	
ESR/M/W510RM (W)	EDR/M/W510RM (E/W)	
ESR/M/W510RM (S)	EDR/M/W510RM (S)	
ESR/M/W510RM (N)	EDR/M/W510RM (N)	