


LED Auxiliary emergency power pack
(For Incorporate into light fitting or remote for downlight)

EMERGENCY POWER PACKS STARLITE



● UFO/NM/L101 NC (Auxiliary)

● Rectangle or ● Square or ● Round

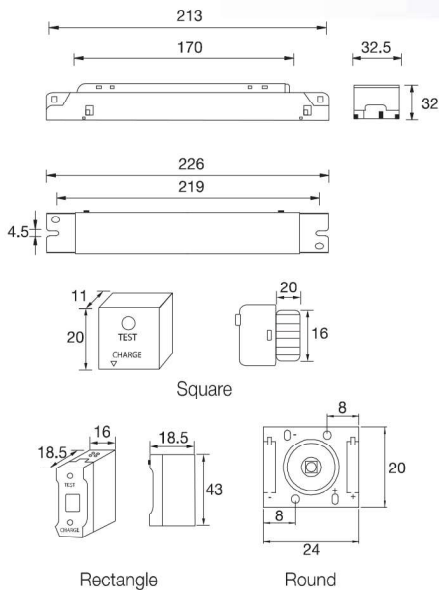

Dimension: mm NTS

High Power L.E.D

KEY FEATURES

- > High Brightness Output
- > High Lumen/watt Efficiency
- > Low Power Consumption
- > Low Maintenance
- > Long Lifespan



TECHNICAL DATA

- Mode of Operation : Non-maintained
- Lamp : 1W High Power LED
- Rated Duration : 2hrs and others
- Mains Supply : 230 Volts, 50/60Hz
- Power Consumption : < 0.9W
- Battery : High temp Nickel Cadmium
- Charge Monitor : Green LED
- Test Facility : Tactile switch
- Safety Feature : Low volt cut-off preventing battery overdischarge
- Fitting Construction : Electro galvanised steel with epoxy powder coating
- Weight (Module only) : 0.25kg (gross)
- Compliance : SS563 : Part 1 & 2, SS IEC 60598-2-22
- Warranty : 1 year

ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Model	Lamp	Battery type
UFO/NM/L101 NC (Auxiliary)	1W LED	Nickel Cadmium