
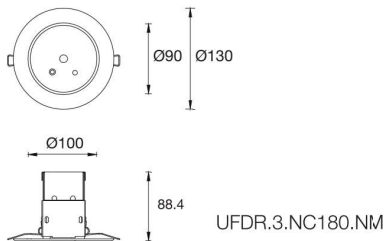


● UFR.3.NC180.NM

● UFDR.3.NC180.NM

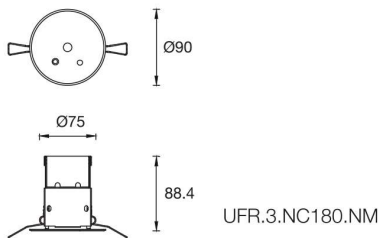

Dimension: mm NTS

High Power L.E.D

KEY FEATURES

- > High Brightness Output
- > High Lumen/watt Efficiency
- > Low Power Consumption
- > Low Maintenance
- > Long Lifespan



Type and batch tested with PSB PLS-LISTED LABEL



076 / 076-0100mm

Recess Mount Miniature Emergency Luminaire



IP30 CLASS I

TECHNICAL DATA

- Mode of Operation : Non-Maintained
- Lamp : 3W High Power LED
- Rated Duration : 3 hrs and others
- Mains Supply : 230 Volts, 50/60Hz
- Power Consumption : < 1.4W
- Battery : High temp Nickel Cadmium
- Charge Monitor : Green LED
- Test Facility : Tactile switch
- Safety Feature : Low volt cut-off preventing battery overdischarge
- Fitting Construction : Electro galvanised steel with epoxy powder coating
- Mounting : Recess
- Weight : 0.8kg (gross)
- Compliance : SS 563 : Part 1 & 2, SS IEC 60598-2-22
- Warranty : 1 year

ORDERING GUIDE *(Please check with Sales Dept if customisation is required)*

Model	Lamp	Battery type
UFR.3.NC180.NM	3W LED	Nickel Cadmium
UFDR.3.NC180.NM	3W LED	Nickel Cadmium