



# EMERGENCY LIGHTS TWIN LAMP

LED Non-maintained emergency twin light



● MTL/NM/L203 NC

● MTL/NM/L203 NC WP  
( Weatherproof )

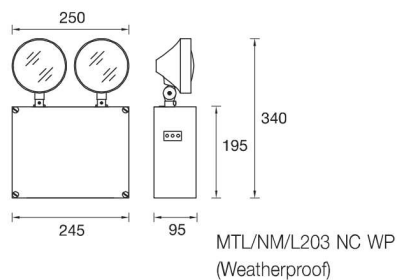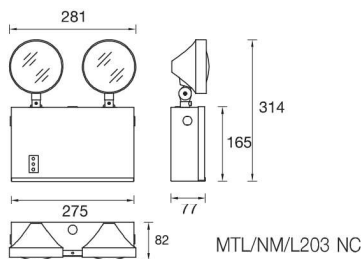

Dimension: mm NTS

**High Power L.E.D**

## KEY FEATURES

- > High Brightness Output
- > High Lumen/watt Efficiency
- > Low Power Consumption
- > Low Maintenance
- > Long Lifespan



Surface Mount  
Wide Angle  
Emergency Luminaire IP30 / IP65



## TECHNICAL DATA

Mode of Operation	: Non-Maintained
Lamp	: 2 x 3W High Power LED
Rated Duration	: 3 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 2.2W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Micro switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Fitting Construction	: Electro galvanised steel with epoxy powder coating The adjustable fire-retardant lamp-heads allow flexibility in angle of projection. Lamp heads comes with anti-glare lens
Mounting	: Wall
Cable Entry	: Ø20mm K/O hole
Weight	: 2.6kg (gross)
Compliance	: SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

## ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Model	Lamp	Battery type
MTL/NM/L203 NC	2 x 3W LED	Nickel Cadmium
MTL/NM/L203 NC WP	2 x 3W LED	Nickel Cadmium

\*Heating strip applicable (for cold room used)



Specifications subject to changes without prior notice.

