


EMERGENCY LIGHTS CLASSIC

SMT LED Non-maintained emergency light
Indoor, corrosion resistant weatherproof emergency light



● JW/NM/W5100

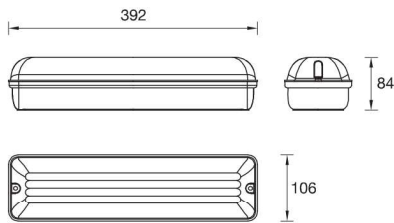

Dimension: mm NTS

TECHNICAL DATA

Mode of Operation	: Non-Maintained
Lamp	: Maxspid 1W SMT LED Lamp
Rated Duration	: 3 hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 1.6W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Push button switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Housing	: Injection moulded fire retardant high impact polycarbonate diffuser and base. Clear reeded diffuser is designed for non-glare and greater light distribution
Mounting	: Wall or ceiling
Cable Entry	: Ø20mm K/O hole
Weight	: 1.0kg (gross)
Compliance	: SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

KEY FEATURES

- > Using Surface Mount Technology LED
- > High Durability & Reliability
- > Low Heat
- > Low Maintenance
- > Low Power Consumption
- > No "Black Ends"

ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Model	Lamp	Battery type
JW/NM/W5100	1W SMT LED	Nickel Cadmium

Note:
Optional silkscreen printed legend on cover to convert into an emergency exit light.
*Heating strip applicable (for cold room used)



Surface Mount
Compact Emergency
Luminaire



Specifications subject to changes without prior notice.

