


# EMERGENCY EXIT LIGHTS LEDER

SMT LED with lifespan 50,000 burning hours  
SMT LED surface / recess mount emergency exit light



● **ES/M/W510RM (E)**  
Running-man graphical exit signs  
comply to latest SS 563 & SS 508

● **ES/M/W5100**  
(with Recess Kit)

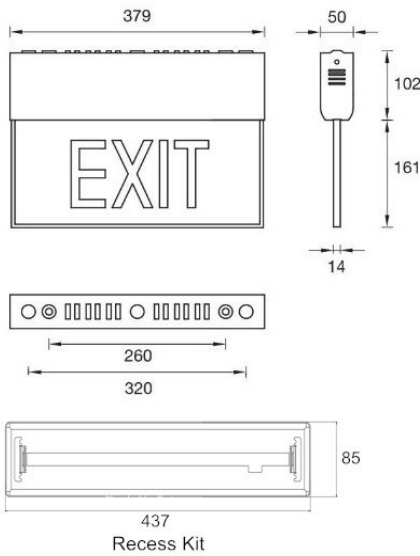

## TECHNICAL DATA

Mode of Operation	: Maintained
Lamp	: Maxspid 1W SMT LED Lamp
Rated Duration	: 2hrs and others
Mains Supply	: 230 Volts, 50/60Hz
Power Consumption	: < 3W
Battery	: High temp Nickel Cadmium
Charge Monitor	: Green LED Ø5mm
Test Facility	: Micro switch
Safety Feature	: Low volt cut-off preventing battery overdischarge
Fitting Construction	: Electro galvanised steel with epoxy powder coating
Diffuser	: Fire retardant moulded acrylic
Mounting	: Wall or ceiling
Cable Entry	: Ø20mm K/O hole
Weight	: 2.5kg (gross)
Compliance	: SS 563 : Part 1 & 2, SS IEC 60598-2-22
Warranty	: 1 year

Dimension: mm NTS

## KEY FEATURES

- > Using Surface Mount Technology LED
- > High Durability & Reliability
- > Low Heat
- > Low Maintenance
- > Low Power Consumption
- > No "Black Ends"



Surface Mount/  
Recess Mount  
Internal Lit  
LED Slim Exit Sign  
410 x 52mm

## ORDERING GUIDE (Please check with Sales Dept if customisation is required)

Single Sided	Double Sided	Legend
ES/M/W5100	ED/M/W5100	
ES/M/W5100 (R)	ED/M/W5100 (R/L)	
ES/M/W5100 (L)	ED/M/W5100 (R/L)	
ES/M/W5100 (D)	ED/M/W5100 (D)	
ES/M/W510RM	ED/M/W510RM	
ES/M/W510RM (E)	ED/M/W510RM (E/W)	
ES/M/W510RM (W)	ED/M/W510RM (E/W)	
ES/M/W510RM (S)	ED/M/W510RM (S)	
ES/M/W510RM (N)	ED/M/W510RM (N)	



Specifications subject to changes without prior notice.

